

## Specifications

LITHRONE G	i40 advanc	e (40-inch Offset Prir	iting Pr	ess) specificat	tions					
Model				GL-240A	GL-440A	GL-540A	GL-640A	GL-740A	GL-840A	
Number of colors				2	4	5	6	7	8	
Max. printing speed spl			sph	16,500						
Max. sheet size mr			mm(in)	750 × 1,050 (29.5 × 41.3)						
Min. sheet size m			mm(in)	360 × 520 (14.2 × 20.5)						
Max. printing area			mm(in)	710 × 1,020 (28 × 40.2)						
Sheet thickness range			mm(in)	0.04 - 0.8 (0.0016 - 0.0315) (0.06 - 1.0 (0.0024 - 0.0394) option)						
Plate size			mm(in)	800 × 1,030 (31.5 × 40.6)						
Blanket size			mm(in)	920 × 1,040 (36.2 × 40.9) (including aluminum bar)						
Feeder pile height			mm(in)	1,100 (43.3)						
Delivery pile height			mm(in)	1,100 (43.3)						
Dimensions	Length (L)*1	Standard	mm(ft)	7,640 (25'1")	9,996 (33')	11,174 (36'8")	12,352 (40'6")	13,530 (44′5″)	14,708 (48'3")	
		Standard + coater + extended delivery	mm(ft)	10,546 (34'7")	12,902 (42'4")	14,080 (46'2")	15,258 (50′1″)	16,436 (53′11″)	17,614 (57′9″)	
	Width (W)	Standard	mm(ft)	3,945 (12'11") (5,675 (18'7") with blower cabinet) 4,095 (13'5") (5,675 (18'7") with blower cabinet)						
		Plinth 300	mm(ft)	3,800 (12'6") (5,530 (18'2") with blower cabinet) 3,950 (12'12") (5,530 (18'2") with blower cabinet					'2") with blower cabinet)	
	Height (H)	Standard	mm(ft)	2,153 (7'1") (2,634 (8'8") with cover open)						
		Plinth 300	mm(ft)	2,453 (8'1") (2,934 (9'8") with cover open)						

LITHRONE G40P advance (40-inch Convertible Perfecting Offset Printing Press) specifications									
Model				GL-440P-A	GL-840P-A	GL-1040P-A			
Number of colors				4	8	10			
Max. printing speed			sph	15,000					
Max. sheet size			mm(in)	720×1,030 (28.3×40.6)					
Min. sheet size			mm(in)	360 × 520 (14.2 × 20.5)					
Max. printing area			mm(in)	$710 \times 1,020$ (28 × 40.2) (single-sided) $700 \times 1,020$ (27.6 × 40.2) (double-sided)					
Sheet thickness range			mm(in)	0.04 - 0.3/0.06 - 0.6 (0.0016 - 0.0118/0.0024 - 0.0236)					
Plate size			mm(in)	800 × 1,030 (31.5 × 40.6)					
Blanket size			mm(in)	$920 \times 1,040$ (36.2 $\times$ 40.9) (including aluminum bar)					
Feeder pile height			mm(in)	1,400 (55.1)					
Delivery pile height			mm(in)	1,400 (55.1)					
	Length (L)*1	Oil-based	mm(ft)	10,699 (35′1″)	15,411 (50′7″)	17,767 (58'3")			
Dimensions		H-UV Specification	mm(ft)	11,191 (36′9″)	15,903 (52'2")	18,259 (59'11")			
	Width (W) plinth 300		mm(ft)	3,800 (12'6") (5,530 (18'2") with blower cabinet) 3,950 (12'12") (5,530 (18'2") with blower ca		'2") with blower cabinet)			
	Height (H) plinth 300		mm(ft)	2,453 (8'1") (2,934 (9'8") with cover open)					

 $<sup>^{*1}\</sup>mbox{Total}$  press length will differ depending on inclusion of options, such as double coaters or DU.

Komori reserves the right to change specifications on machines, without notice, to improve reliability, function or design. Komori is under no obligation arising from use that does not correspond to the standard safety measures for the product noted herein and other precautions. The technical information in this catalog constitutes an explanation of the representative operations of the product and grants no rights or license belonging to Komori Corporation or third parties. The photographs in this catalog include some special specifications. Additionally, specifications are current as April 2022 and, along with photographs, are subject to change at a later date due to product improvements.



## KOMORI CORPORATION 11-1, Azumabashi 3-chome, Sumida-ku, Tokyo 130-8666, Japan Tel: +81-3-5608-7817-19 Fax: +81-3-3624-6955

GL-40A/GL-40P-A en JPN 16P N01 1 Apr.2022 5.9K MP

# LITHRONE G40 LITHRONE G40P



40-inch Offset Printing Press 40-inch Convertible Perfecting Offset Printing Press



<sup>\*</sup> When performing double-sided printing on the Lithrone G40P advance using oil-based ink, a margin is required on the back of the sheet for the suction wheel.

 $<sup>{}^*\</sup>hbox{Maximum printing speed may differ depending on chosen specifications and printing conditions}.$ 

<sup>\*</sup> Performance and numbers may differ from specifications herein. Specifications may also be modified for product improvements.

<sup>\*</sup> Please contact a sales representative for information on specs not listed.





The advance advantage

configuration and adjustments,

Advance automates

After introducing KP-Connect Pro and advance presses

The KP-Connect advantage

**KP-Connect Pro minimizes** 

downtime by digitalizing

# Komori's Lithrone advance series takes offset print production to the next level

### The Lithrone G40/G40P advance provides world-class ROI\*1

Komori developed the advance series, which offers world-class ROI, in order to improve productivity and profitability for printing companies. In addition to the high return on press investment, advance presses fully support digitalization making the most formidable production press available. Using KP-Connect Pro to link prepress, press and postpress processes optimizes overall production, helping to create smart factories that achieve the highest overall productivity with the least amount of effort. The advance series is all about improving the many micro areas of the process to make a large impact. This is what makes advance series the clear frontrunner in achieving digital transformation for printing companies.

LITHRONE G40

## advance × KP-Connect for optimal productivity

According to the data, on average, only 33% of press operating time is spent on production printing\*2.

Manually configuring and

adjusting settings for items


such as feeder and delivery are

Factors that interfere with productivity

Legacy methods of delegating processes and

communicating information

In conjunction with KP-Connect Pro, the new advance press is able to transform makeready and idle time into production printing.

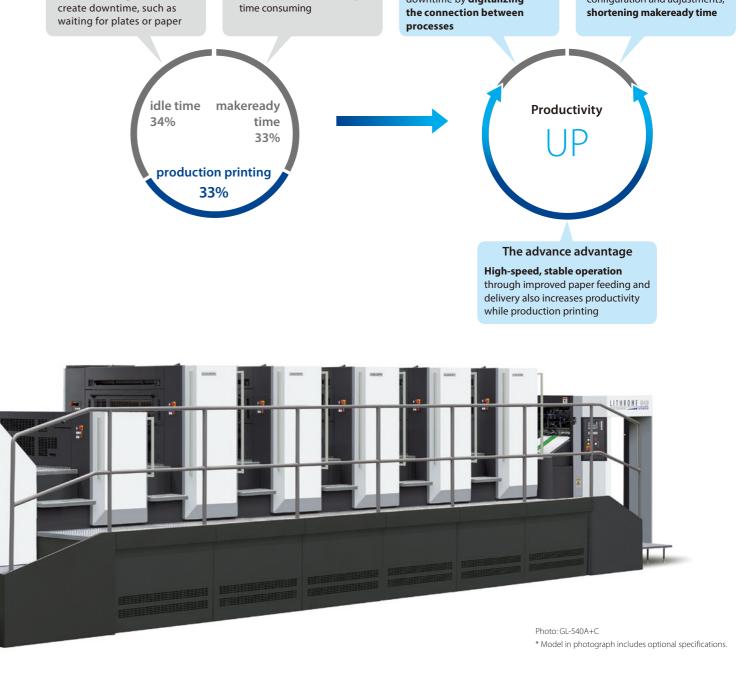

<sup>\*1</sup> ROI: Return on Investment

## Creating smart factories using CONNECTED AUTOMATION

The digital transformation is sweeping the print industry. Through Connected Automation will print providers be able to take advantage and arrive at the new smart factory model. Komori's key to Connected Automation and achieving the smart factory model is through use of Komori's KP-Connect Pro. KP-Connect Pro software enables unified management of a range of devices and information, to better maximize productivity.

#### Three advantages of advance presses and KP-Connect Pro

#### **Visualization**

#### Link production processes and monitor operations

- Print room operating status can be checked in real-time, even when off-site
- Operators can grasp the progress of connected processes and status of important materials such as plates and paper, for more efficient makeready
- Automatically create a variety of reports, using actual results data, helping to improve productivity



#### **Automation**

#### Automatic job linking between prepress, press and postpress

- Job information from the scheduler is automatically carried over to the press, reducing time spent on configuring complex settings.
- Print operators can specify automatic output of printing plates without stopping production\*1
- \*1 Conditions may apply in regard to compatible manufacturers.



## **Optimization**

#### Digitalization of process management, for optimization overall production

- Shifting from analogue methods (such as job tickets) to digitalization greatly reduces time spent on process management
- · Automatically scheduling optimal job order, with less time spent on makeready and arrangements, for instance by prioritizing fast turnaround jobs, or grouping together jobs that use the same ink or paper size



## **KP-Connect** Komori Solution Cloud

## **KP-Connect** Basic

#### Monitor operations remotely, anytime, anywhere

KP-Connect visualy analyzes and graphs real print operation data, helping to improve productivity.

## **KP-Connect** Pro


#### Links all devices, to visualize and optimize entire site

Monitor progress of all jobs in realtime, at a glance, including prepress, press and postpress. Connected Automation, including MIS and production scheduling, increases overall site efficiency.

## advance presses offer high ROI

ROI is the lifeblood of printing companies, and the advance series of presses is dedicated to providing world-class ROI. Komori achieves this high ROI by focusing on three areas.



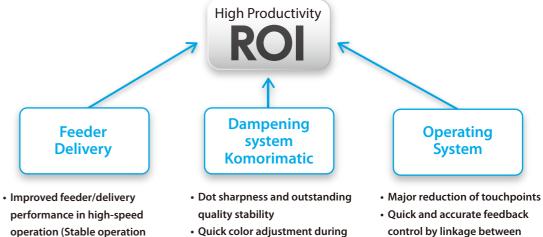


- with light or heavy stocks) • Easy operation by means of
- automation
- Significant improvement of sheet alignment performance
- makeready
- · Improved suitability for highspeed, long-run printing
- control by linkage between systems
- Automatic presets by KP-Connect linkage

#### Reasons for increased production efficiency

Improved paper feed and delivery allow for shorter production printing time when printing speed is increased. Additionally, shorter makeready time allows for more jobs to be handled in the same amount of time. Improved production efficiency allows for downsizing, for instance by handling jobs previously carried out on three presses on two presses instead, thus increasing productivity. Additionally, shorter makeready time allows for more jobs within a given timeframe.

\* Run length is the same

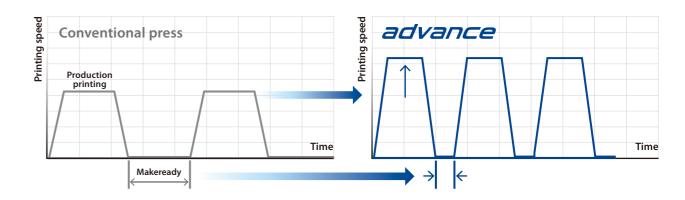

## Impressively fast and more stable production

High-performance paper feed and delivery is indispensable for more productive, high-speed operation. The high-speed technology of the Lithrone GX series has been fully applied to the advance series, it enables stable, high-speed printing on both thin and thick paper alike. Komori also paid particular attention to ease of operation, reducing operator workload to even allow for one-man operation.



#### Smart and easy paper loading

#### Feeder pile guide pointer New

Operators can load paper into approximate position using two pointers on each side of the feeder pile. The press will automatically take over lateral paper feed adjustments, reducing the operator skillset and workload.



#### Better air flow, for stable, high-speed feeding of all types of paper

Sucker box New

Redesigned air efficiency for paper handling allows for stable, sheet-by-sheet separation, whether dealing with a thin, supple paper or a thick, rigid paper. Optimization of suction head position also helps stop the paper from bending within the sucker box, for stable operation at the highest speeds.



#### Stable paper feed, even with wrap or wave curled product

#### Front lay New


The register front lay has also been radically redesigned. Structural improvements to the lay hood, at the point of contact with the paper, ensures a stable feed, even for difficult paper that tends to warp or wave.



#### Exceptional sheet alignment even during high-speed printing

#### Delivery fan zone New

Fan control zones have been increased to 11 areas. Optimal air controls allow paper alignment to be fine-tuned for type and size. High-performance paper delivery improves efficiency during high-speed printing.



New : New feature Unique : A unique Komori feature. Applies to following pages.



## Supports digitalization. Unique Komori systems drastically reduce operator workload

KHS-Al is an integrated, self-learning control system that fully supports operators, from job start-up to production printing, reducing makeready time and paper waste. Further, connecting to KP-Connect also allows production information to be shared digitally, helping to optimize production. All color measurement and control devices are originally developed by Komori. Synergy between reliable production (such as ink keys with high accuracy and followability) and systems ensure faster color and registration adjustment and dramatically shorter makeready times. The systems also provide swift and accurate, automatic feedback, freeing operators from time consuming, in-run, adjustments.



#### Simple, one-screen operation, for ease of use

KHS-AI, ease of use New

During job registration, makeready and production printing, all necessary information for each phase is gathered onto a single screen. Adjustments can be made during production printing while referencing registration, color and moistures levels. The number of touches required to switch screens has also been reduced, shortening configuration time and helping to prevent human error. Additionally, job settings can be automated via KP-Connect Pro, reducing configuration time by approximately 85% compared to previously.

#### More efficient makeready through self-learning

KHS-AI, high precision preset function Unique

Ink key adjustments, air levels and registers can be automatically preset according to paper size/paper information from the job information, greatly reducing makeready time. Selflearning tools are also installed to update data with each use, further fine-tuning presets.

## Machine-regulated density, saves on time and paper


KHS-AI, smart feedback feature Unique


A unique Komori feature that provides guick feedback when density levels differ from target density, and is capable of responding even to initial falloffs in density. Density is measured with PDC-SX, and the amount of ink applied to the roller is then adjusted based on any calculated excess or shortcoming. These unique ink fountain controls can re-adjust to target density within around 30 sheets, dramatically reducing paper waste.


## Automatic color and register controls, with no need for a loupe


PDC-SX (Spectral Density Control) Unique

PDC-SX not only measures color but also registration, feeding results back to the press. This also applies to register on the back of the sheet. This reduces wasted time, workload and paper when registration does not match.










#### Operator-free quality while printing

PQA-S V5 (In-line Print Quality Assessment System for Sheetfed) Unique

Quality inspection: Checks for printing problems and prevents misprints from passing to postpress

Color control: Measures color bar and automatically adjusts to match and maintain

**Automatic register control:** Measures dedicated registration marks to automatically adjust for and maintain unit-to-unit registration




<sup>\*</sup> Figures show Komori measurements under specific conditions. No warranty is implied.

<sup>\*</sup> Use the two-dimantional codes on pp. 12-13 to view video of each feature.

## A new package production machine for the SDGs\*1 era

Komori's advance series enhances package printing. Makeready costs have been minimized by reducing time and work spent on processes such as changing and cleaning special colors, preparing coaters or changing out thick paper, helping to increase profitability even during short-run printing. Additionally, by standardizing ink types, Komori's new Smart Color\*2 technology can eliminate the need for color changing and allow for color controls similar to those used for process colors, further shortening makeready time.

<sup>\*2</sup> A wide gamut, 6- or 7-color solution for special colors, adding either O and G (orange and green) or O, G and V (orange, green and violet) to the traditional CMYK.

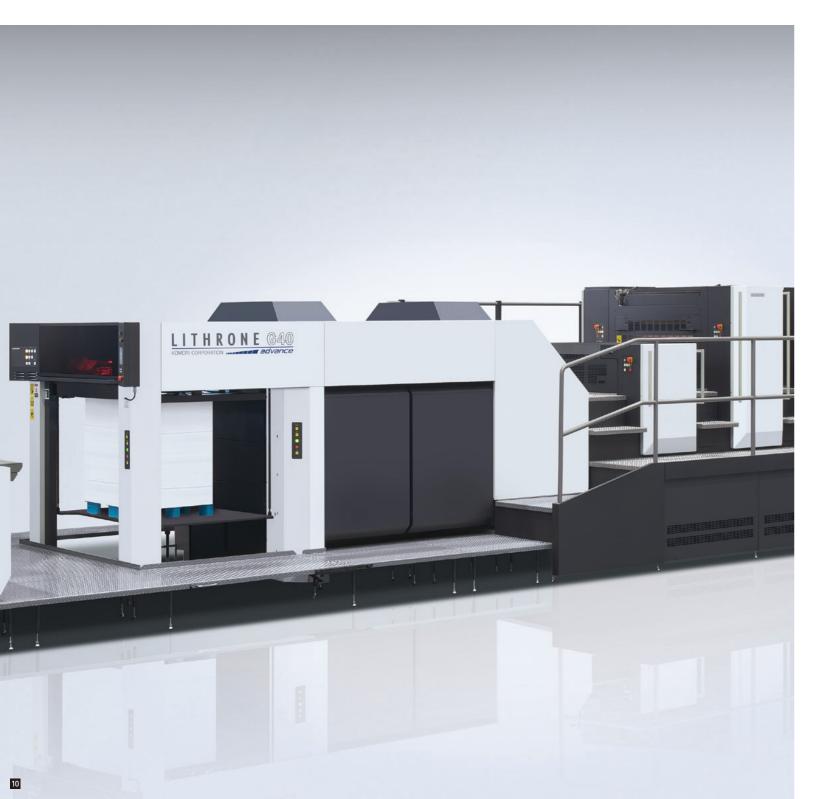

#### Stable, high quality with Komori's unique dampening system

#### Komorimatic Unique

Komorimatic, Komori's unique dampening system offers the sharp dots and fast color acquisition, with increased effectiveness for high-speed long runs. The four dampening rollers and reverse-slip system creates a thin film of water that is uniform in both the lateral and vertical directions while using the minimum required amount of water. Maintaining a stable water and ink balance minimize surface inconsistencies. Also well-suited for environmentally friendly, alcohol-free printing.

## Superior dot shape reproduction reduces waste of a portion of the product due to color variation in step and repeat jobs. Unique

When printing multi-up images for packaging, it is important to minimize color difference from lead to tail. The Komorimatic dampener on advance presses minimizes color inconsistencies by providing a highly consistent and stable water layer. When coupled with precise ink key and ink film control from the Komori inker, color consistency is optimized providing expert color reproduction, less waste, and increased profitability.

\* Color difference compared to standard density is measured at 6 locations when printing 500/2,000 sheets, using ④ on the 500th sheet as standard.25%, 50% and 75% CMY gray patches are used.

#### Quick color acquisition for repeat jobs

#### Special color-compatible pre-inking New

Pre-inking has been further strengthened, allowing for a variety of special colors to be reproduced with a high degree of accuracy. Past data can be called up when repeating jobs to automatically create the ideal ink thickness, special color. This greatly reduces paper waste and shortens time required for color matching.

#### \*Requires PDC-SX (optional).

#### Eliminates turbidity after roller washing

#### Special surfactant for ink rollers Unique

Package printing involves a large number of color changes, making roller washing very time-consuming, particularly when changing from a deep color to a lighter Komori's special surfactant lifts surface staining to deep clean the roller, minimizing turbidity.


## Coater plate changing can be quickly handled by a single operator


#### Coater clamp system advance New

A new tension mechanism was adopted for coater clamping. Plate tension can be adjusted by manipulating a single adjustment on the gripper and tail side, allowing for easy plate changing by a single operator. Coater blanket and photopolymer plate changing time is shortened by approximately 40% compared to previous.

#### includes options.











<sup>\*1</sup> SDGs : Sustainable Development Goals

<sup>\*</sup> Figures show Komori measurements under specific conditions. No warranty is implied.

<sup>\*</sup> Use the two-dimantional codes on pp. 12-13 to view video of each feature

... High-speed printing

.. Reduced paper waste


.. Environment/safety


... Short makeready


Quality

## Functionality to meet a wide range of needs and further increase ROI


The advance presses offer a wide line-up of features to increase ROI, making them suited to all types of printing, including commercial, publishing and package printing.

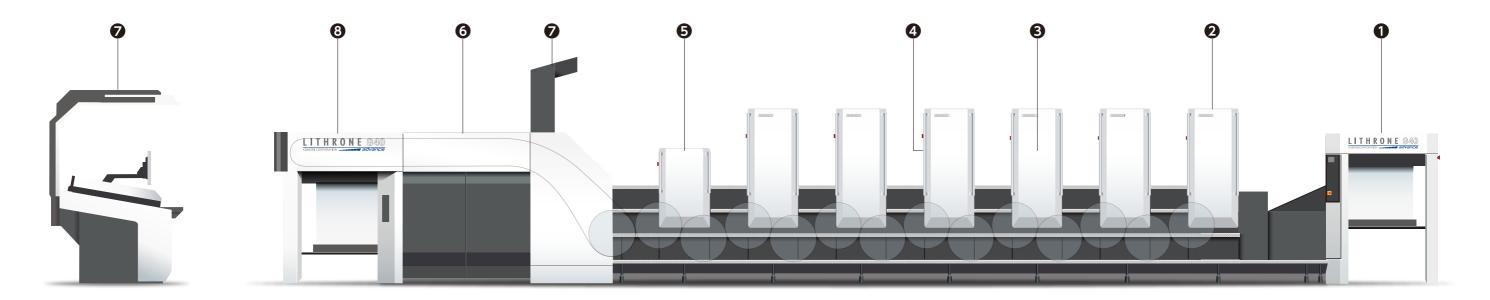

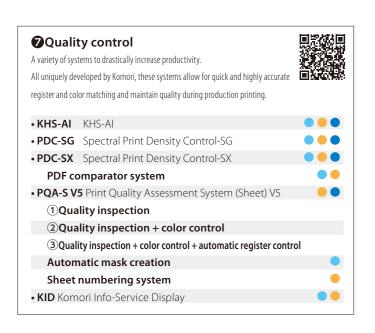







**2**Unit/other

and heat levels.

Komorimatic


DC blower


• Ink mist extractor fans


• Ink mist removing device

Includes a system to prevent UV ink mist from scattering, for increased

environmental friendliness. DC blowers also help to reduce power consumption

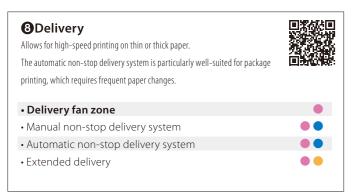

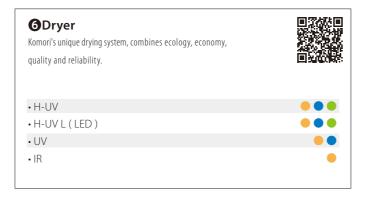

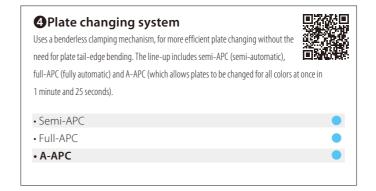

<sup>\*</sup> Restrictions apply regarding availability on different models and available combinations of features.

12

 $<sup>\</sup>hbox{\rm *Figures show Komori measurements under specific conditions. No warranty is implied.}$ 


 $<sup>{\</sup>rm *URL} \ for above \ two-dimantional \ codes: https://www.komorisolutions.com/video/en/g40ag40ap.html.}$ 

## LITHRONE G40 / LITHRONE G40P

# An adaptable perfecting press capable of handling both double-sided printing and one-sided multicolor printing



With increasing worker shortages, improving production efficiency is more important than ever. The Lithrone G40P advance allows you to handle double-sided printing and one-sided multicolor printing with a single machine. Komori's unique three double-size cylinder are perfect for a wide variety of jobs, from thin paper to thick, with minimal scuffing and marking. The impressive productivity achieved through one-pass printing makes it possible to downsize, covering work previously handled on two or three single-side presses on a single machine. This improves productivity and profitability, while also contributing to the environment by reducing electricity consumption and paper waste. In addition to perfecting presses, Komori offers a lineup of double-sided presses built to increase productivity depending upon the paper used. The Lithrone GX40RP/GX44RP advance is made for commercial printing, publishing and full-scale package printing, while the Lithrone S40SP/S44SP is perfect for one to two color, double-sided publishing printing.





#### Three double-size cylinder Unique

Equipped with Komori's unique, high-performance perfecting mechanism. All double-size cylinder create a gentle sheet path with minimal scuffing and tearing, allowing for high-speed double-sided printing on thin and thick paper, alike.

## Examples of custom setups/major applications

H-UV L (LED)
UV dryer
IR dryer

Overprint varnishCoater varnishPrimer


Silver varnish

Lithrone G40 advance (40-inch Offset Printing Press)

#### General commercial printing

5-color standard (example setup: GL-540A)


Special colors/overprint varnish, quality inspection + color control

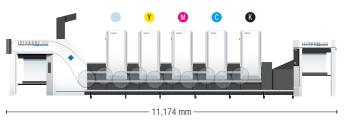

Package printing: Standard setup for package printing covering a wide variety of needs, such as printing using special colors, metalized paper/transparent film and various varnishes


6-color with coater on 300 mm plinth (example setup: GL-640A + C + extended delivery)

White ink, overprint varnish, aqueous/UV varnish, quality inspection + color control



#### Package printing: Setup for package printing using Smart Color technology, which does not require color changing

8-color with coater on 300 mm plinth (example setup: GL-840A + C + extended/double delivery)
Smart color 7-colors, overprint varnish, UV varnish, quality inspection + color control, sorted delivery

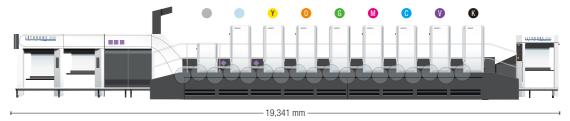

#### $Package\ printing: Setup\ for\ high\ added-value\ package\ printing\ using\ elements\ such\ as\ silver\ underprint\ or\ matte+gloss\ varnish$

 $8-color\ with\ coater\ on\ 300\ mm\ plinth\ (example\ setup:\ GL-840A:\ 1C+C+DU+7C+C+DU+DU+C+extended\ delivery)$   $Primer,\ underprint\ UV\ silver\ varnish,\ special\ colors\ aqueous/UV\ varnish\ (matter+gloss),\ quality\ inspection+color\ control$ 




#### Lithrone G40P advance (40-inch Convertible Perfecting Offset Printing Press)

#### General commercial printing/publishing

8-color standard (example setup: GL-840-A)

One-sided multicolor printing, double-sided one-pass printing, quality inspection + color control

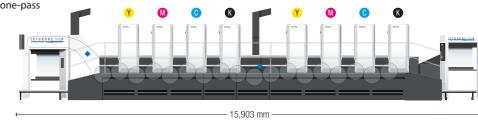

<sup>\*</sup>Additional workspace, not included in machine dimensions, is required for installation, such as for operator stands, surrounding equipment/cabinets and paper transport